


FC Series Signal Conditioners

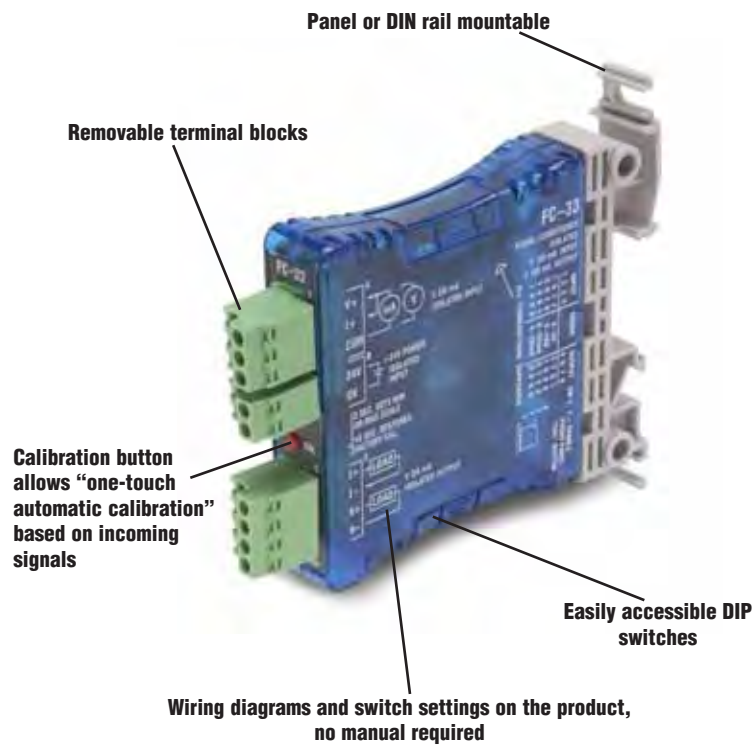

Convert, isolate and transmit your process signals

Not all electrical signals are created equal. That's why the FC series signal conditioners are the perfect solution for converting process, temperature and other electrical signals into voltage or current signals for transmission or input to a PLC.

The FC series signal conditioners offer 1500V isolation between the input and output to help eliminate electrical noise. Features include easily accessible potentiometer adjustment of the output span and offset, (with the exception of FC-33), slim DIN-rail or side-mount cases and removable terminal blocks.

The FC series signal conditioners are ideal for use with PLCs, loop controllers, digital displays and any other applications requiring an isolated or analog signal.

- PLC Overview
- DL05/06 PLC
- DL105 PLC
- DL205 PLC
- DL305 PLC
- DL405 PLC
- Field I/O
- Software
- C-more HMIs
- Other HMI
- AC Drives
- Motors
- Steppers/Servos
- Motor Controls
- Proximity Sensors
- Photo Sensors
- Limit Switches
- Encoders
- Current Sensors
- Pushbuttons/Lights
- Process
- Relays/Timers
- Comm.
- TB's & Wiring
- Power
- Circuit Protection
- Enclosures
- Appendix
- Part Index




FC-33 <--->

DC Selectable Signal Conditioner with 3-way isolation

Field configurable input and output ranges of 0-5V, 0-10V, 0-20 mA and 4-20 mA with 1500 VDC isolation between input and output, and 1500 VDC isolation from 24 volt power and input/output. LED indicates normal operation and is used in conjunction with the calibration pushbutton for the internal calibration process.

- 3-way 1500V isolation
- Push button calibration



FC-T1 <--->

Thermocouple/mV Isolated Signal Conditioner

Field configurable input for several different types of thermocouple or mV inputs with 1500 VDC isolation between input and output. Cold junction compensation and burnout detection. Alarm/run LED.

- 1500V isolation
- Cold junction compensation (CJC)
- Internal diagnostics (burnout detection or calibration errors)



FC-11 <--->

4-20 mA Isolated Signal Conditioner

Loop powered 4-20 mA input/output signal with 1500 VDC isolation between input and output.

- 1500V isolation
- Loop powered



FC-R1 <--->

RTD Input Signal Conditioner

Loop powered, non-isolated, 3-wire unit converts an RTD input to a linear 4-20 mA signal. User selectable CU10, PT100 or PT1000 input.

FC-R1 RTD Input Loop Powered Signal Conditioner



Overview

The FC-R1 is a DIN-rail or side-mount Resistive Temperature Detector signal conditioner. It is a non-isolated signal conditioner which converts a 3-wire RTD to a linearized 4-20 mA current loop signal.



The FC-R1 has a user selectable CU10 (10 Ohm copper), PT100 (100 Ohm platinum) or PT1000 (1000 Ohm platinum) RTD input, and also offers OFFSET (zero) and SPAN (full scale) adjustments of the output signal. The OFFSET has an adjustment range of 0 to 25% of full scale output and the SPAN has an adjustment of 80% to 102%.

Specifications			
Input Ranges	CU10	-200°C to 260°C	-328°F to 500°F
	PT100	-200°C to 850°C	-328°F to 1562°F
	PT1000	-200°C to 595°C	-328°F to 1103°F
RTD Excitation Current	CU10, PT100	500 μ A \pm 50 μ A	
	PT1000	80 μ A \pm 20 μ A	
Common Mode Range	0 - 3.5 VDC		
Output Range	4-20 mA (linearized)		
Maximum Inaccuracy	0.35% FSO / CU10		
	0.2% FSO @ 25°C / PT100 & PT1000		
	0.26% FSO @ 60°C / PT100 & PT1000		
Maximum Loop Supply	30 VDC		
Load Impedance	0 Ω minimum		
Maximum Load/Power Supply	203 Ω / 12 V, 745 Ω / 24 V		
Linearity Error	0.35% FSO / CU10		
	0.2% FSO / PT10 & PT1000		
Output Slew Rate	1% @ 20 mS		
Filter Characteristics	105 dB @ DC, 60 dB @ 10 Hz, 40 dB @ 60Hz		
Stability	0.05% FSO maximum		
Operating Temperature	0 to 60°C (32 to 140°F)		
Storage Temperature	-20 to 70°C (-4 to 158°F)		
Relative Humidity	5 to 90% (non-condensing)		
Environmental Air	No corrosive gases permitted		
Vibration	ML STD 810C 514.2		
Shock	ML STD 810C 516.2		
Noise Immunity	NEMA ICS3-304		


See page 23-23 for signal conditioner dimensions.

Application

The FC-R1 field configurable input signal conditioner is useful for interfacing RTD sensors to PLC analog current input modules. It is recommended that shielded RTD's be used whenever possible to minimize noise on the input signal.

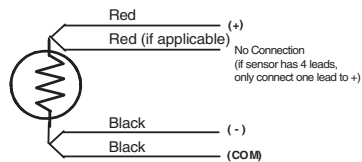

Typical User Wiring

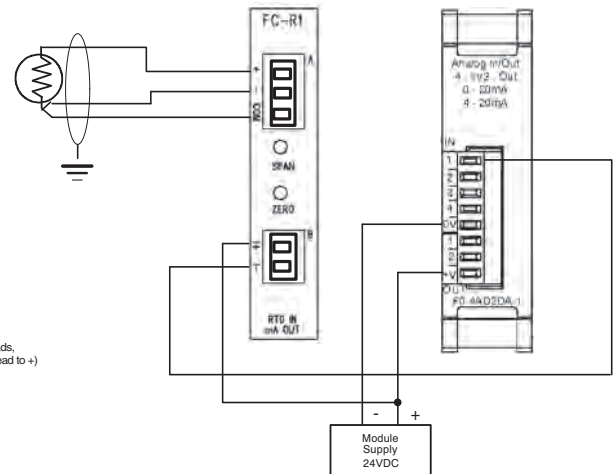

RTD Signal Conditioner to 4-20 mA DL05/06 analog module
Only use three wire and four wire RTDs.