

# IGS-3008

## 8 10/100/1000T L2+ Industrial Managed Switch w/ Enhanced G.8032 Ring

- *Enhanced G.8032 ring protection < 20ms for single ring. Supports auto mode\*, enhanced mode\*, train mode\* and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 8MSTI /RSTP*
- *Miss-wiring avoidance & Repowered auto ring restore (node failure protection)*
- *User friendly UI, including auto topology drawing; Complete CLI.*
- *Support LACP link aggregation, VLAN, QoS, IGMP v3/router port, GMRP\*, GVRP\*, DHCP server & client, DHCP Option 82 relay / server\*, TACACS+\*, INGRESS/EGRESS ACL L2/L3\*, SSH/SSL\*, IPv6, SMS*
- *Dual 9.5V~60VDC input*
- *N-key \*\* for configuration restore, backup and firmware upgrade*
- *Optional Environmental monitoring function to display inside switch info incl. temperature, voltage, current, power consumption*



## OVERVIEW

Lantech IGS-3008 is a high performance L2+ all Gigabit switch with 8 10/100/1000T which provides L2 wire speed and advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms for single ring, comprehensive QoS, VLAN, GVRP\*, advanced security SSH/SSL\*, TACACS+\*, INGRESS/EGRESS ACL L2/L3\*, IGMPv1/v2/v3/router port, DHCP server/relay, jumbo frame which are important features required in mid and large network. It also supports Cisco Discovery Protocol (CDP) and LLDP for Ciscoworks to detect the switch info and to be shown on L2 map topology.

### **Loop protection; Auto ring repowered restore; Alert by email, trap, SMS**

The IGS-3008 also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech IGS-3008 is able to alert with the LED indicator and send out an email, trap or a SMS text. Repowered auto ring restore function (node failure protection) ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep ring alive without any re-configuration needed. Loop protection is also available to

prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

### **User friendly UI; Auto topology drawing\*; DMI for dB value**

The user friendly UI, innovative auto topology drawing\* and topology demo makes IGS-3008 much easier to get hands-on. The switch also equips the RTC (real time clock) which can keep track of time always. The TX power/RX power raw data is automatically converted to dB values for installer, making it easier to calculate the fiber distance. The complete CLI enables professional engineer to configure setting by command line.

### **Enhanced G.8032 Ring < 20ms covering multicast packets for single ring recovery; Enhanced\*/basic/auto\*/train\*mode; MSTP/RSTP**

Lantech IGS-3008 features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering Multicast packets. It also supports various ring topologies that covers double ring, multi-chain (under enhanced ring\*), train ring\*, basic ring by easy setup than others. The innovative auto-Ring\* configurator (auto mode) can calculate owner and neighbor in one step. It supports MSTP that allows RSTP over Vlan for redundant links with 8 MSTI.

**DHCP server / client ; DHCP option 82 relay, port based\*/Mac based DHCP\*; DHCP Option 66**

It supports the standard DHCP server/client as well as DHCP option 82 relay. The port based DHCP\* distribution can offer the same IP address on port base where there is need to replace the new device connecting to Lantech switches to avoid any network disruption. The DHCP Option 82 server\* offers the convenience of policy setting on the switch. Mac based DHCP server\* function binds a fixed IP address and a client Mac address to include dumb switches in DHCP network. It also supports DHCP Option 66.

**QoS by VLAN\* for legacy device**

QoS by VLAN\* can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

**QinQ\*, QoS QinQ\* and GVRP\* supported**

It supports the QinQ, QoS QinQ, GVRP for large VLAN segmentation.

**IGMPv3,GMRP\*, router port, static multicast forwarding and multicast Ring protection**

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP\*, router port and static multicast forwarding binding by ports for video surveillance application.

**Exported configuration text file; Factory reset button; CPU watchdog**

The configuration file of Lantech IGS-3008 can be exported in text file so that it can be edited and configured back to switch with ease for mass deployment. Factory reset button can

restore the setting back to factory default and built-in watchdog design can automatically reboot the switch when CPU is found dead.

**N-key\*\* for back up, restore configuration and upgrade firmware**

With N-key\*\*, the configuration file can be mass auto backup, editable restored and auto upgrade firmware for easy maintenance.

**Relay alarm and email/trap/SMS alerting**

Featured with relay contact alarm function, the IGS-3008 is able to connect with alarm system in case of power failure and port disconnection. In case of such event, it will send out email, SMS, trap alerting to predefined users.

**Dual 12V~48V input; High reliability and extended working temperature**

Lantech IGS-3008 is designed with dual input power at 9.5V~60VDC and provides  $\pm 2000V$  EFT/SURGE and  $\pm 6000V$  contact ESD protection, which can reduce unstable situation caused by power line and Ethernet. It has high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.

**Optional environmental monitoring for inside switch info**

The optional environmental monitoring can detect switch overall temperature, voltage, current and power consumption where can send the SNMP traps, email and SMS alert when abnormal.


The -E model can be used in extreme environments with an operating temperature range of -40°C to 75°C.

## FEATURES & BENEFITS

- 8 10/100/1000T SNMP industrial switch
- Support 10K bytes jumbo frames
- Dual 9.5V~60VDC power input
- Back-plane (Switching Fabric): 16Gbps
- 16K MAC address table
- 10KB Jumbo frame supported on all ports
- User friendly UI, auto topology drawing\*, topology demo, complete CLI for professional setting
- Enhanced G.8032 Ring protection in 20ms (single ring)
  - Support single ring, double ring\*, multi-chain\* topology with easy setup than ever
  - Auto ring configuration\*
  - Basic mode compatible with 3<sup>rd</sup> party ERPS
  - Covers multi-cast and data packets
  - Ring covers multicast on different ports
- Provides EFT/SURGE protection  $\pm 2000$  VDC for power line
- Supports  $\pm 6000$  VDC ESD contact protection
- Built-in RTC (Real Time Clock) to keep track of time
- Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority
- IEEE 802.1d STP\*, IEEE 802.1w RSTP, 802.1s MSTP VLAN redundancy with 8 MSTI
- 4K 802.1Q VLAN, Port based VLAN, GVRP\*, QoS by VLAN\*
- Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console/ Lantech™ InstaConfig\*/ Lantech™ InstaView\*
- DHCP server / client; DHCP Option 82 relay/ server\*; Mac based DHCP\*; Port based DHCP\*, DHCP Option 66\*
- Bandwidth Control
  - Ingress packet filter and egress rate limit
  - Broadcast/multicast packet filter control
- Relay alarm output system events
- Miss-wiring avoidance
  - LED indicator
  - Email, traps, or SMS notification
- Repowered auto ring restore
  - Ensure the switches in a ring to survive after power breakout is back
  - The status can be shown in NMS when each switch is back

- **TFTP/HTTP firmware upgrade; Lantech™ InstaConfig\* for multiple upgrade**
- **Configuration backup and restoration**
  - Supports text configuration file for system quick installation
  - N-key\*\* for mass configuration auto-backup, editable restoration and auto firmware upgrade
- **System Event Log, SMTP Email alert, SMS mobile (text) and SNMP Trap for alarm support; 32 RMON counters**
- **Security**
  - SSL\*/SSH/ L2&L3\*
  - Port Security: MAC address entries/Filter/MAC-Port binding
  - IP Security: IP address security management to prevent unauthorized intruder.
  - Management access control with priority
  - TACACS+\*
  - INGRESS/EGRESS ACL L2/L3\*
- Login Security: IEEE802.1X/RADIUS\*
- HTTPS for secure access to the web interface\*
- **Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application**
- **Multicast static forwarding for non- IGMP camera to prevent flooding; IGMP router port to assign query in ring and for reversed multicast video flow**
- **IGMPv1,v2,v3 with Query mode for multimedia; GMRP\***
- **Factory reset button to restore setting to factory default**
- **Optional environmental monitoring for system input voltage, current, ambient temperature**
- **Watchdog design to auto reboot switch CPU is found dead**
- **IP30 metal housing with DIN rail and Wall-mount\*\* design**

**DIMENSIONS (unit=mm)**

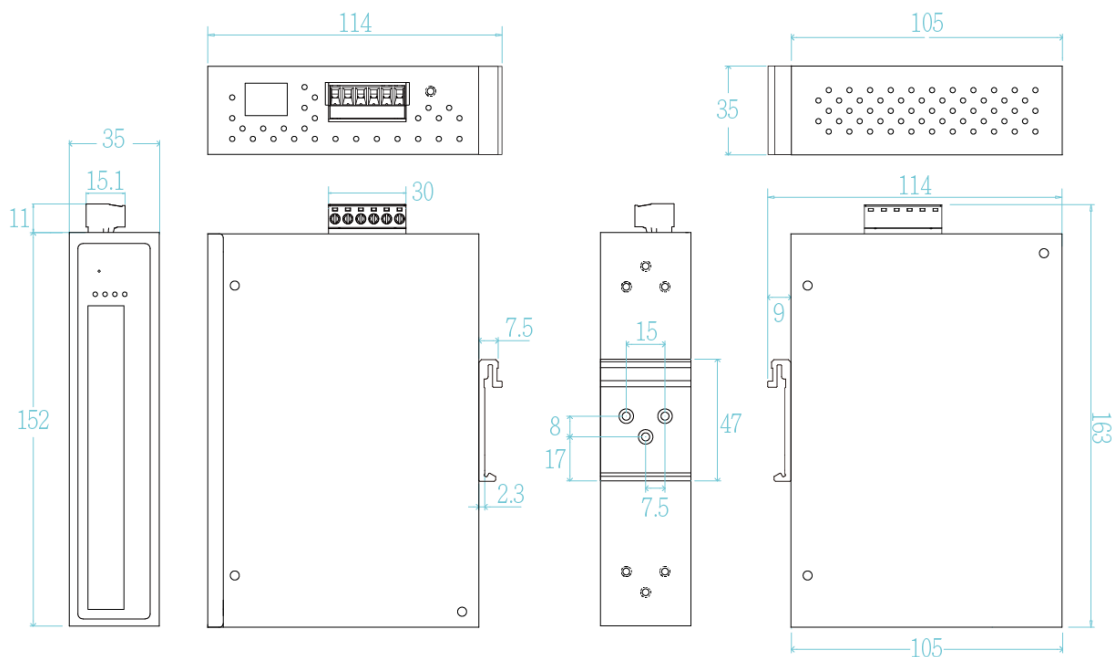

**SPECIFICATION**

Hardware Specification		IEEE802.1Q VLAN Tag
Standards	IEEE802.3 10Base-T Ethernet	Switch Architecture
	IEEE802.3u 100Base-TX	Back-plane (Switching Fabric): 16Gbps
	IEEE802.3ab 1000Base-T Ethernet	Transfer Rate
	IEEE802.3z Gigabit fiber	14,880pps for Ethernet port
	IEEE802.3x Flow Control and Back Pressure	148,800pps for Fast Ethernet port
	IEEE802.3ad Port trunk with LACP	1,488,000pps for Gigabit Fiber / Gigabit Ethernet port
	IEEE802.1d Spanning Tree	CPU
	IEEE802.1w Rapid Spanning Tree	Marvell 1600Mhz
	IEEE802.1s Multiple Spanning Tree	RAM
	IEEE802.3ad Link Aggregation Control Protocol (LACP)	512M Byte
	IEEE802.1AB Link Layer Discovery Protocol (LLDP)	Flash
	IEEE802.1X User Authentication (Radius)	128M Byte
	IEEE802.1p Class of Service	Mac Address
		16K MAC address table
	Jumbo frame	
	10KB on all ports	
	Connectors	
	10/100/1000T: 8 x ports RJ-45 with Auto MDI/MDI-X function	
	Power & Relay connector: 1 x 6-pole terminal block	
	Network Cable	
	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable	
	EIA/TIA-568 100-ohm (100m)	

	100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)	Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues
Protocol	CSMA/CD	IP Security	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.
LED	Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green) Ethernet port: Link/Activity (Green), Speed (Amber);	Login Security	Supports IEEE802.1X Authentication/RADIUS*
Operating Humidity	5% ~ 95% (Non-condensing)	Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"
Operating Temperature	-20°C~60°C / -4°F~140°F (Standard model) -40°C~75°C / -40°F~167°F(-E model)	Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control*/MAC-Port binding TACACS+* INGRESS/EGRESS ACL L2/L3* SSL*/SSH for Management HTTPS* for secure access to the web interface
Storage Temperature	-40°C~85°C / -40°F~185°F	IGMP	Support IGMP snooping v1,v2,v3; Supports IGMP static route; 256 multicast groups; IGMP router port ; IGMP query; GMRP*
Power Supply	9.5V~60VDC; Dual input	Static MAC-Port bridge	Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
Power Consumption	10W	Bandwidth Control	Support ingress packet filter and egress packet limit. The egress rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.
Case Dimension	IP-30, 35 (W) x 105 (D) x 152 (H) mm	RTC	Built-in Real Time Clock to keep track of time always
Weight	660 g	Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex
Installation	DIN Rail and Wall Mount** Design	System Log	Supports System log record and remote system log server
EMI & EMS	FCC Part 15 Class A IEC/EN61000-6-2 CE EN55032 Class A CE EN55024: CE EN61000-4-2 (ESD) Level 3 CE EN61000-4-3 (RS) Level 3 CE EN61000-4-4 (EFT) Level 3 CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3 CE EN61000-4-8 (Magnetic field) Level 3	SMTP/Text SMS	Supports SMTP Server and 8 e-mail accounts for receiving event alert; can send SMS text alert via mobile
Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)	Relay Alarm	Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V
MTBF	NA	Protection	<ul style="list-style-type: none"> <li>■ Miss-wiring avoidance</li> <li>■ Repowered auto ring restore</li> <li>■ Loop protection</li> </ul>
Warranty	5 years	SNMP Trap	Up to 10 trap stations; trap types including: <ul style="list-style-type: none"> <li>● Device cold start</li> <li>● Authorization failure</li> <li>● Port link up/link down</li> <li>● Topology change(ITU ring)</li> <li>● Power failure</li> <li>● Environmental abnormal**</li> </ul>
<b>Software Specification</b>			
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI	DHCP	Provide DHCP client/ DHCP Server/ DHCP option 82 relay /DHCP option82 server* ; Mac based DHCP*; Port based DHCP*, DHCP option 66*
SNMP MIB	RFC 1215 Traps MIB*, RFC 1213 MIBII RFC 1158 MIBII RFC 1157 SNMP MIB*, RFC 1493 Bridge MIB*, RFC 1573 IF MIB RFC 2674 VLAN MIB, Partial RFC 1757 RMON, RFC 2674 Q-Bridge MIB*; Bridge MIB*, LLDP MIB* RSTP MIB* Private MIB	DNS	Provide DNS Client feature and support Primary and Secondary DNS server.
Enhanced G.8032 ring	Support ITU G.8032 v2/2012 for single ring protection in less than 20ms for self-heal recovery; Support Enhanced mode*,basic mode; auto mode* and train mode* Support double ring*, multi-chain ring*, etc. Covers multicast and data packets	SNTP	Supports SNTP to synchronize system clock in Internet
User friendly UI	<ul style="list-style-type: none"> <li>■ Auto topology drawing*</li> <li>■ Topology demo</li> <li>■ Auto configuration for G.8032(auto mode)* for single ring</li> <li>■ Complete CLI for professional setting</li> </ul>	Environmental Monitoring**	System status for input voltage, current, consumption and ambient temperature to be shown in GUI and sent alerting if any abnormal status(-M models)
Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups/Maximum 10 trunk members	Firmware Update	Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade; Lantech™ InstaConfig* for multiple upgrade
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN	Configuration upload and download	Supports text configuration file for system quick installation N-key** for mass firmware auto-backup, editable restoration and auto upgrade
CDP	Cisco Discovery Protocol for topology mapping	IfAlias	Each port allows an alphabetic string of 128-byte assigned as its own unique name via the SNMP or CLI interface.
VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.), GVRP*, QoS by VLAN*, QinQ*, QOS QinQ*		
IPv6/4	Present		
RSTP/MSTP	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree with 8 MSTI		
Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP		

\*Future Release  
\*\* Optional Release

**ORDERING INFORMATION**

- **IGS-3008**.....P/N: **8350-9881**  
8 10/100/1000T Managed Industrial Switch, dual isolated 9.5V~60VDC input; -20°C to 60°C
- **IGS-3008-E**.....P/N: **8350-9891**  
8 10/100/1000T Managed Industrial Switch, dual isolated 9.5V~60VDC input, -40°C to 75°C
- **IGS-3008-M**.....P/N: **8350-9882**  
8 10/100/1000T Managed Industrial Switch + environmental monitoring, dual isolated 9.5V~60VDC input; -20°C to 60°C
- **IGS-3008-M-E**.....P/N: **8350-9883**  
8 10/100/1000T Managed Industrial Switch + environmental monitoring, dual isolated 9.5V~60VDC input, -40°C to 75°C
- **N-key Configurator**.....P/N: **8850-100**  
RJ45 connector dongle for firmware upgrade, auto/editable configuration backup and restoration; -20°C to 60°C

**OPTIONAL ACCESSORIES****DIN Rail Power**

- **MDR-40 Series**     40W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ;  
Operating Temp. -20°C~70°C (ambient, derating each output at 4% per degree from 60°C ~ 70°C)
- **MDR-20 Series**     20W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ;  
Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

**Lantech Communications Global Inc.****[www.lantechcom.tw](http://www.lantechcom.tw)**  
**[info@lantechcom.tw](mailto:info@lantechcom.tw)**

© 2016 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
Lantech may make changes to specification and product descriptions at anytime, without notice.