

FC-B34 Bipolar Voltage to Unipolar Voltage or Current Signal Conditioner



Overview

The FC-B34 is a 35 mm DIN-rail or side-mount, selectable bipolar input to unipolar output signal conditioner with isolation between input and output, and isolation between 24-volt power and input/output. The FC-B34 field configurable isolated signal conditioner is useful in eliminating ground loops and interfacing sensors to PLC analog input modules. It translates bipolar voltage input to unipolar voltage output or bipolar voltage input to a current output. The input and output signal levels are selected via DIP switches. In addition, the outputs can be either a direct conversion of the inputs or an inversion (a reverse acting operation). The user also has the option of customizing the input OFFSET (zero) and SPAN (full scale) adjustments that can be set to a percentage of the full scale via a pushbutton on the front panel.


Specifications	
Input Specifications	
Input Ranges	± 15 V, ± 10 V, ± 5 V, ± 100 mV, ± 50 mV (DIP Switch Selectable)
Input Impedance	2 M ohm
Protection Type, Component	Polarity Protection Diode
External DC Power Required	24 VDC $\pm 10\%$, 50 mA, Class 2
User Calibration Range	OFFSET (zero): 0-20% (e.g. -4V / ± 5 V mode) SPAN (full-scale): 80-102% (e.g. 4.0 - 5.1V / ± 5 V mode)
Output Specifications	
Output Ranges	0-5V, 0-10 V, 0-20 mA, 4-20 mA (DIP Switch Selectable)
Load Impedance	2 kilohm Minimum, Voltage Output 550 ohm Maximum, Current Output
Sample Duration Time	10 ms
Maximum Inaccuracy	0.1% FSO (± 15 V, ± 10 V, ± 5 V Inputs), 1.5% FSO (± 100 mV, ± 50 mV Inputs) @ 25°C
Accuracy vs. Temperature	+/-60 PPM of Full Scale/ °C Maximum
Output Current	21 mA max for mA-Out mode/ 10 mA max for Volt-out mode
Terminal Block Specifications	
Field Wiring	Removable Screw Type Terminal Blocks, (included)
Number of Positions	2 (Dinkle: EC350V-02P), 2 (Dinkle: EC350V-02P), 4 (Dinkle: EC350V-04P)
Wire Range	28-14 AWG solid or stranded conductor; wire strip length 1/4" (6-7mm)
Screw Torque	1.7 inch-pounds (0.19 Nm)
General Specifications	
Surrounding Air Temperature	0 to 60°C (32 to 140°F) IEC 60068-2-14 (Test Nb, Thermal Shock)
Storage Temperature	-20 to 70°C (-4 to 158°F) IEC 60068-2-1 (Test Ab, Cold) IEC 60068-2-2 (Test Bb, Dry Heat) IEC 60068-2-14 (Test Na, Thermal Shock)
Enclosure Rating	IP20
Humidity	5 to 95% (non-condensing) IEC 60068-2-30 (Test Db, Damp Heat)
Environmental Air	No corrosive gases permitted (EN61131-2 pollution degree 1)
Vibration	MIL STD 810C 514.2 IEC 60068-2-6 (Test Fc)
Shock	MIL STD 810C 516.2 IEC 60068-2-27 (Test Ea)
Insulation Resistance	>10 M Ω @ 500 VDC
Noise Immunity	NEMA ICS3-304 IEC 61000-4-2 (ESD) Impulse 1000 V @ 1 μ S pulse IEC 61000-4-4 (FTB) RFI, (145 MHz, 440 MHz 5W @ 15 cm) IEC 61000-4-3 (RFI)
Weight	0.3lbs
Isolation	1800 VDC Power to Input 1800 VDC Power to Output 1800 VDC Input to Output applied for 1 second (100% tested)
Agency Approvals	UL508*, File Number: E157382, CE

* In order to comply with UL508, the supplied power must be less than 26 VDC and fused at a maximum of 3 amps.

FC-B34 Applications and Dimensions


Application Example 1

The FC-B34 can be used to convert a bipolar ± 10 VDC signal to a 4-20 mA signal.

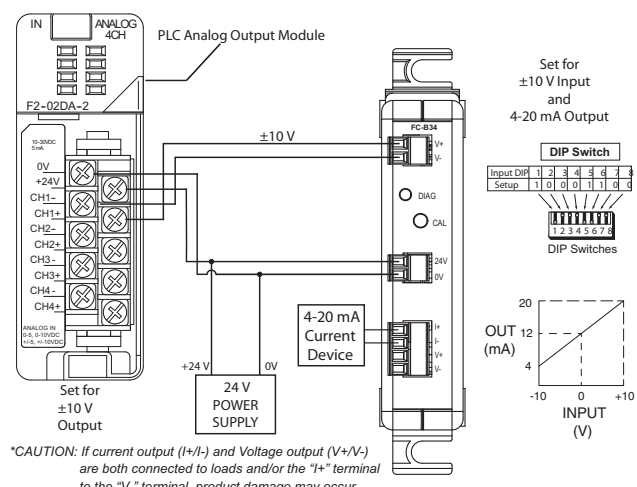

Application Example 2

The FC-B34 can be used to convert the bipolar ± 10 VDC from a DCT100-10B-24S current transducer to a 4-20 mA or 0-10 VDC that can be used by a PLC.

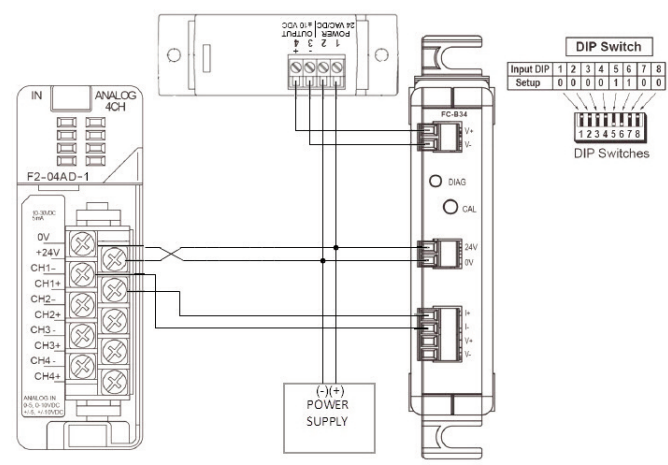

Wiring Connections

Input Terminal Block	
Faceplate Label	Description
V+	Signal In +
V-	Signal In -

Output Terminal Block	
Faceplate Label	Description
I+	Current
I-	Current
V+	Voltage
V-	Voltage

External Power Terminal Block	
Faceplate Label	Description
24 V	24 VDC $\pm 10\%$ (Class 2)
0V	0V

Switch/LED Labels	
Faceplate Label	Description
DIAG	Diagnostic LED flashing indication
CAL	Pushbutton switch input to initiate calibration, etc.

Dimensions

inches [mm]

