

IES-3424DSFP-2P

24 10/100TX + 4 DualSpeed SFP Industrial L2+ Switch

w/ Enhanced G.8032 Ring

- *Enhanced G.8032 ring protection < 20ms for single ring. Supports auto mode, enhanced mode, train mode and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 8/16* MSTI /RSTP*
- *Support LACP link aggregation, IGMP v3/router port, DHCP server & DHCP Option82 for Port/VLAN based DHCP distribution, Mac based DHCP server, QoS by VLAN, SSH/SSL, HTTPS, INGRESS/EGRESS ACL L2/L3*
- *Support relay contact DIDO for real time voltage, current and case ambient temperature*
- *Miss-wiring avoidance & Node failure protection*
- *User friendly UI, including auto topology drawing and DDM threshold with dB values***, Complete CLI supported*
- *USB slot for edited restoration and auto backup*



OVERVIEW

Lantech IES-3424DSFP-2P is a high performance L2 + managed industrial switch which provides L2 wire speed and advanced security function for network aggregation and backbone deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms including train ring, enhanced mode for easy configuration, comprehensive QoS, QoS by VLAN, advanced security including INGRESS/EGRESS ACL L2/L3, SSH/SSL, Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port, QinQ (double tag VLAN) which are important features required in train and large network. It also supports Cisco Discovery Protocol (CDP) and LLDP for Ciscoworks to detect the switch info and show on L2 map topology.

Lantech IES-3424DSFP-2P features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering Multicast packets. It also supports various ring topologies that covers double ring, multi-chain (under enhanced ring), train ring, basic ring by easy setup than others. The innovative auto-Ring configurator (auto mode) can calculate owner and neighbor in one step. It supports MSTP that allows RSTP over Vlan for redundant links with 8/16* MSTI.

The IES-3424DSFP-2P also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech IES-3424DSFP-2P is able to alert with the

LED indicator and send out an email or traps. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep ring alive without any re-configuration needed when power back. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. For the ending device which need to download file from TFTP server, DHCP Option66 server can offer IP address of TFTP server to DHCP client. Optional basic IPv6 DHCP service can be supported.

The user friendly UI, innovative auto topology drawing and topology demo makes IES-3424DSFP-2P much easier to get hands-on. The IES-3424DSFP-2P supports DMI interface that can correspond with DDM SFPs (Digital diagnostic monitor) to display the five parameters in Lantech's UI, including optical output power, input power, temperature, laser bias current and transceiver supply voltage***. The TX power/RX power raw data is automatically converted to dB values for installer, making it easier to calculate the fiber distance. The complete CLI support allows professional setting.

Lantech IES-3424DSFP-2P configuration can be exported and editable which makes the mass deployment easier. Also, it designs with a factory reset button where user can reset all settings to factory default. The built-in watch dog design can reboot switch automatically when CPU is found dead. The USB slot allows user to backup/ restore configuration.

QoS by VLAN can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

The IES-3424DSFP-2P DIDO function can support additional open/close physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the switch was moved or stolen. In case of events, the IES-3424DSFP-2P will immediately send an email to pre-

defined addresses as well as SNMP Traps out. It provides 2DI and 2DO while disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors into the auto alarm system and transfer the alarm information to IP network with email, text and SNMP.

Lantech IES-3424DSFP-2P supports dual power inputs from DC9.5~60V, 85~265VAC or 100V~370VDC. It features high reliability and robustness withstanding extensive EMI/RFI phenomenon, lighting surge, inductive load switching, high ESD, high fault current environment usually found in Substation, Steel automation, Mining and Process control etc. Supporting the latest EEE (Efficient Energy Ethernet) standard, IES-3424DSFP-2P can run under widely operational temperature (-40°C~75°C) in the harsh environment.

FEATURES & BENEFITS

■ System Interface/Performance

- 24x10/100TX + 4 100M/1000M SFP L2+
- 16K MAC Address Table
- Dual Power Supply Design for DC(9.5V~60VDC), AC(85V~265VAC) or 100V~370VDC
- -40to 75C operation temperature(-E model)

■ User friendly UI, Auto topology drawing, topology demo, Complete CLI for professional setting

■ IPv6/v4 supported

■ Enhanced G.8032 Ring protection in 20ms < 256 switches

- Support various ring/chain topologies, including train ring
- Enhanced G.8032 ring configuration with ease
- Auto ring configuration (auto mode) for single ring
- Ring covers multicast on different ports

■ DDM to support SFP diagnostic function***

- Automatically convert the raw data into dB values for TX power/RX power, making it easier to measure the fiber distance

■ 256 groups MSTP over VLAN

■ VLAN

- 4K 802.1Q Vlan, Port Based VLAN, GVRP, QinQ

■ Port Trunk with LACP 14 trunks with automatic link failover

■ LACP link aggregation to add bandwidth

■ QoS (Quality of Service)

- Supports IEEE 802.1p CoS
- Per port provides 8 priority queues
- Port-base, Tag-base and TOS Priority
- Strict priority and WRR

■ Security

- SSL/SSH/INGRESS/EGRESS ACL L2/L3
- MAC address table: MAC address entries/Filter/MAC-Port binding
- IP Security: IP address security management to prevent unauthorized intruder.
- Management access control with priority

- Login Security: IEEE802.1X/RADIUS

- HTTPS for secure access to the web interface

■ Miss-wiring avoidance

- LED indicator
- Email or traps notification

■ Node failure protection

- Ensure the switches in a ring to survive after power breakout is back
- The status can be shown in NMS when each switch is back

■ IGMP v1,v2,v3 and Proxy** for Multimedia Application; GMRP

■ IGMP router to select another Query mode and support IGMP static routing for reversed IGMP flow to bind with port for IP surveillance application

■ Supports IEEE802.1ab LLDP, Cisco CDP

■ Basic DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server for Port/ Vlan based DHCP distribution; DHCP Option 66

■ Mac based DHCP server to assign IP address that includes dumb switches in DHCP network

■ Bandwidth Control

- Ingress Packet Filter and Egress Rate Limit
- Broadcast/Multicast Packet Filter Control

■ System Event Log, Email alert and SNMP Trap for alarm support

■ Environmental sensor built-in to detect temperature, voltage, current and send out SNMP traps and emails if there is abnormal events

■ TFTP/HTTP firmware upgrade; USB for edited restoration and auto backup

■ Reset / Factory default button to restore factory setting


■ Watch dog design to reboot switch if CPU is found dead

■ Provides EFT protection ±4K VDC for power line

■ Supports ±8KV contact & ±15KV air Ethernet ESD protection

■ 2 DI/DO and 1 relay contact alarm

DIMENSIONS (unit=mm)

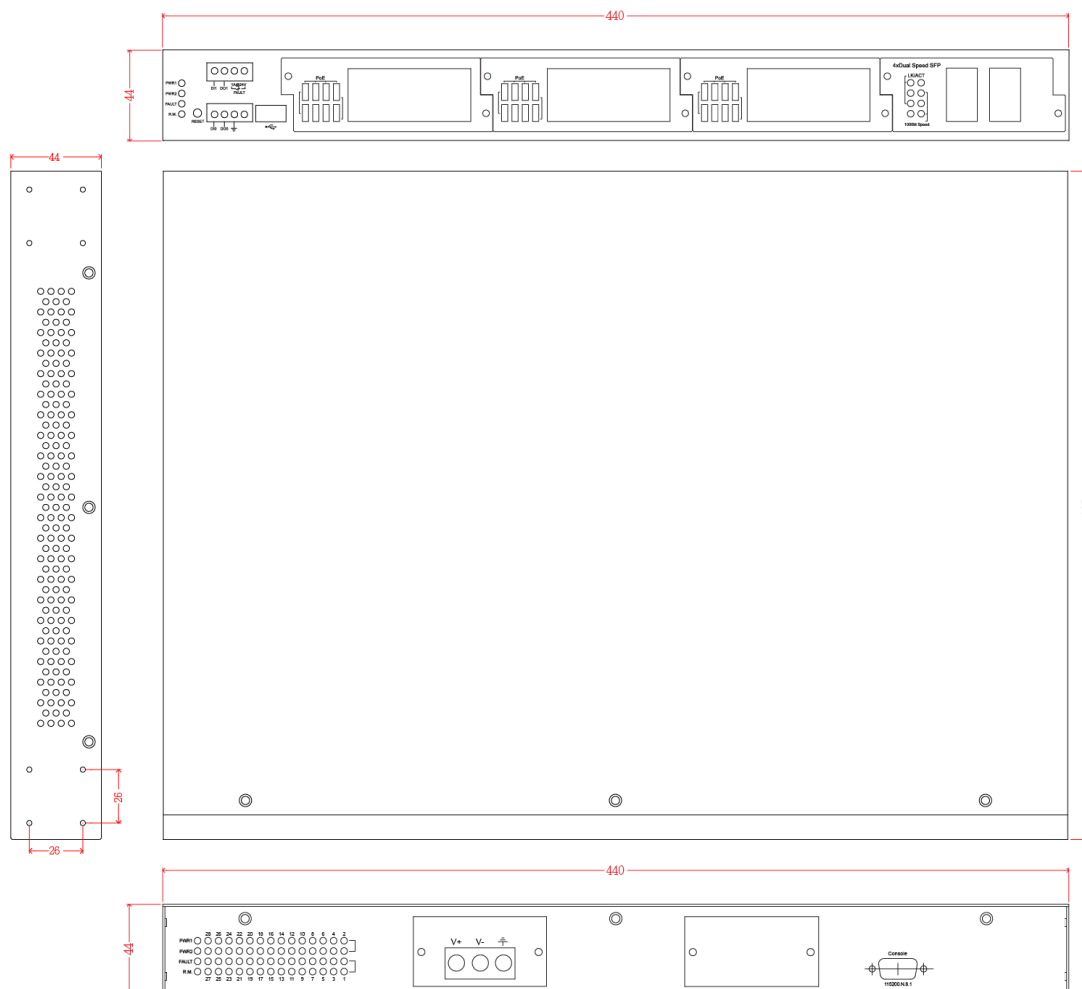

SPECIFICATION

| Hardware Specification | |
|------------------------|---|
| IEEE Standards | IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3z 1000Base-T Ethernet IEEE802.3z Gigabit fiber IEEE 802.3x Flow Control Capability ANSI/IEEE 802.3 Auto-negotiation IEEE 802.1Q VLAN IEEE 802.1p Class of Service IEEE 802.1X Access Control IEEE 802.1D Spanning Tree IEEE 802.1w Rapid Spanning Tree IEEE 802.1s Multiple Spanning Tree IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.1AB Link Layer Discovery Protocol (LLDP) IEEE 802.1x User Authentication (Radius) |
| Switch Architecture | Back-plane (Switching Fabric): 12.8Gbps |
| Transfer Rate | 14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet / Gigabit Fiber port |
| CPU | Marvell 800Mhz |
| RAM | 256M Byte |
| Flash | 128M Byte |
| MAC Address | 16K MAC address table |
| Jumbo frame | 10KB on all ports |
| Connectors | 24 10/100TX RJ-45 with auto MDI/MDI-X function 4 100M / 1000M Mini-GBIC : SFP sockets RS-232 console: Female DB-9 USB for automatic backup and restore |
| DDM | Conform to SFF-8472 to show diagnostic SFP with temperature, current, voltage, input and output power |
| Protocol | CSMA/CD |
| LED | Per unit: Power 1 (Green), Power 2 (Green), Alarm (Red) ,R.M (Green) Link/Activity (Green), Full duplex/collision(Yellow)), MINI GBIC (Link/Activity)(Green) |
| Power Supply | Two power sockets, 9.5-60VDC input IEC320 85-265VAC conversion (-AC model) AC/DC 85-265VAC/100V-370VDC conversion (-HV model) |
| Power | Full load: 30W/ Unload: 13W |

| | |
|---|--|
| Consumption | |
| Relay Alarm | Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V |
| DI/DO | 2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA |
| RTC | RTC(Real Time Clock) to keep track of time always |
| Factory reset button & watch dog design | Factory reset button to restore back to factory default settings. Watch dog design can reboot switch automatically when CPU is found dead |
| Case Dimension | 19" Metal case,IP-30; 440mm(W)x325mm(D)x44mm(H) |
| Operating Humidity | 5%~95% (Non-condensing) |
| Operating Temperature | Standard: -20°C ~60°C Extended temperature : -40°C ~75°C |
| Storage Temperature | -40°C ~85°C |
| EMI | FCC Class A, CE EN61000-4-2 (ESD), CE EN61000-4-3 (RS), CE EN-61000-4-4 (EFT), CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8, CE EN55032 Class A, CE EN55024 |
| Stability Testing | IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration), IEC60870-2-2, IEC60068-2-30 |
| MTBF | 511,958 hours |
| Warranty | 5 years |
| Software Specification | |
| Management | SNMP v1 v2c, v3/ Web/Telnet/CLI Management |
| SNMP MIB | RFC 1213 MIBII RFC 1158 MIBII RFC 1157 SNMP MIB*, RFC 1493 Bridge MIB*, RFC 1573 IF MIB Partial RFC 1757 RMON, RFC 2674 Q-Bridge MIB* LLDP MIB* Private MIB |
| VLAN | Port based VLAN, up to 28 groups IEEE802.1Q Tag VLAN Static VLAN groups up to 256, Dynamic VLAN group up to 2048, VLAN ID from 1 to 4096 GVRP up to 256 groups** Multicast VLAN registration*, QinQ |
| Port Trunk with LACP | LACP Port Trunk: 8 Trunk groups/Maximum 24 trunk members |
| LLDP | Support LLDP to allow switch to advise its identification and capability on the LAN |
| CDP | Cisco Discovery protocol for topology mapping |
| ITU G.8032 | Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (basic mode) Support various ring/chain topologies Includes train ring Enhanced G.8032 ring configuration with ease |
| User friendly UI | <ul style="list-style-type: none"> ■ Auto topology drawing with detail node info ■ DDM threshold with dB values*** ■ Complete CLI for professional setting |
| Spanning Tree | Support IEEE802.1d Spanning Tree,IEEE802.1w Rapid Spanning Tree, IEEE 802.1s MSTP |
| Quality of Service | The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP |

| | |
|----------------------------------|--|
| Class of Service | Support IEEE802.1p class of service, per port provides 8 priority queues |
| QoS by VLAN | Tagged QoS by VLAN for all devices in the network |
| Port Security | Support 50 entries of MAC address for static MAC and another 50 for MAC filter |
| Port Mirror | Support 3 mirroring types: "RX, TX and Both packet" |
| Multicast Filtering & IGMP | Support IGMP snooping v1,v2,v3; Supports IGMP static route IGMP query and router port 1024 multicast groups and IGMP query GMRP |
| Static MAC-Port bridge | Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application |
| Bandwidth Control | Support ingress packet filter and egress packet limit. The egress rate control supports all of packet type, the limit rates are 0~100Mbps. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set from 0 to 100Mbps The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit. |
| Network Security | Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/MAC-Port binding Management access control with priority Ingress/Egress ACL L2/L3 SSL/ SSH for Management HTTPS for secure access to the web interface |
| Protection | <ul style="list-style-type: none"> ■ Miss-wiring avoidance ■ Node failure protection ■ Loop protection |
| Flow Control | Support Flow Control for Full-duplex and Back Pressure for Half-duplex |
| System Log | Support System log record and remote system log server |
| SMTP | Supports SMTP Server and 8 e-mail accounts for receiving event alert |
| SNMP Trap | Up to 10 trap stations; trap types including: <ul style="list-style-type: none"> ● Device cold start ● Authorization failure ● Port link up/link down ● DI/DO open/close ● Typology change(ITU ring) ● PoE ping failure ● Power failure ● Environmental abnormal |
| DHCP | Provide DHCP Client/ DHCP Server/DHCP Option 82/Port based & VLAN based DHCP distribution (DHCP relay agent) |
| Mac based DHCP Server | Assign IP address by Mac that can include dumb switch in DHCP network |
| DNS | Provide DNS client feature and support Primary and Secondary DNS server. |
| SNTP | Support SNTP to synchronize system clock in Internet |
| Firmware Update | Support TFTP /HTTP firmware update |
| Configuration backup and restore | Support text backup and restore; USB for edited restoration and auto backup |

*Future Release
**Optional

***Optional DDM SFP required

ORDERING INFORMATION

- **IES-3424DSFP-2P.....P/N: 8380-506**
24 10/100TX + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated DC 12~56VDC power supply + 1x additional power socket; -20°C to 60°C
- **IES-3424DSFP-2P-E.....P/N: 8380-507**
24 10/100TX + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated DC 12~56VDC power supply + 1x additional power socket; -40°C to 75°C
- **IES-3424DSFP-2P-AC.....P/N: 8380-508**
24 10/100TX + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated AC85~265VAC IEC320 power conversion + 1x additional power socket; -20°C to 60°C
- **IES-3424DSFP-2P-AC-E.....P/N: 8380-509**
24 10/100TX + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated AC85~265VAC IEC320 power conversion + 1x additional power socket; -40°C to 75°C
- **IES-3424DSFP-2P-HV.....P/N: 8380-510**
24 10/100TX + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated AC/DC 85~265VAC/100V~370VDC power conversion + 1x additional power socket; -20°C to 60°C
- **IES-3424DSFP-2P-HV-E.....P/N: 8380-511**
24 10/100TX + 4 Dual SFP L2 plus Industrial Switch
Built-in 1x isolated AC/DC 85~265VAC/100V~370VDC power conversion + 1x additional power socket; -40°C to 75°C

OPTIONAL ACCESSORIES

DIN Rail Power

- **MDR-40 Series** 40W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 4% per degree from 60°C ~ 70°C)
- **MDR-20 Series** 20W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

Mini GBIC (SFP)

- | | |
|--|---|
| ■ 8330-162X MINI GBIC 1000SX (LC/MM/0.5KM) Transceiver | ■ 8330-187 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1550) |
| ■ 8330-163X MINI GBIC 1000SX2 (LC/MM/2KM) Transceiver | ■ 8330-180 1.25Gbps BiDi SFP 40KM Transceiver (WDM 1310) |
| ■ 8330-165X MINI GBIC 1000LX (LC/SM/10KM) Transceiver | ■ 8330-182 1.25Gbps BiDi SFP 40KM Transceiver (WDM 1550) |
| ■ 8340-0591 MINI GBIC 1000LHX (LC/SM/40KM) Transceiver | ■ 8330-181 1.25Gbps BiDi SFP 60KM Transceiver (WDM 1310) |
| ■ 8330-166 MINI GBIC 1000XD (LC/SM/50KM) Transceiver | ■ 8330-183 1.25Gbps BiDi SFP 60KM Transceiver (WDM 1550) |
| ■ 8330-169 MINI GBIC 1000XD (LC/SM/60KM) Transceiver | ■ 8330-184 1.25Gbps BiDi SFP 80KM Transceiver (WDM 1490) |
| ■ 8330-167 MINI GBIC 1000ZX (LC/SM/80KM) Transceiver | ■ 8330-185 1.25Gbps BiDi SFP 80KM Transceiver (WDM 1550) |
| ■ 8330-170 MINI GBIC 1000EZ (LC/SM/120KM) Transceiver | ■ 8330-071 125Mbps BiDi SFP 2KM (WDM 1310) Transceiver |
| ■ 8330-168 MINI GBIC 10/100/1000T (100m) Transceiver | ■ 8330-072 125Mbps BiDi SFP 2KM (WDM 1550) Transceiver |
| ■ 8330-060 MINI GBIC 100Base (LC/MM/2KM) Transceiver | ■ 8330-069 125Mbps BiDi SFP 20KM (WDM 1310) Transceiver |
| ■ 8330-065 MINI GBIC 100Base (LC/MM/5KM) Transceiver | ■ 8330-068 125Mbps BiDi SFP 20KM (WDM 1550) Transceiver |
| ■ 8330-061 MINI GBIC 100Base (LC/SM/30KM) Transceiver | ■ 8330-080 125Mbps BiDi SFP 40KM (WDM 1310) Transceiver |
| ■ 8330-197 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1310) | ■ 8330-082 125Mbps BiDi SFP 40KM (WDM 1550) Transceiver |
| ■ 8330-198 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1550) | ■ 8330-081 125Mbps BiDi SFP 60KM (WDM 1310) Transceiver |
| ■ 8330-195 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1310) | ■ 8330-083 125Mbps BiDi SFP 60KM (WDM 1550) Transceiver |
| ■ 8330-196 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1550) | ■ 8330-084 125Mbps BiDi SFP 80KM (WDM 1310) Transceiver |
| ■ 8330-188 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) | ■ 8330-085 125Mbps BiDi SFP 80KM (WDM 1550) Transceiver |
| ■ 8330-189 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1550) | ■ 8330-191 Dual Speed SFP 100M/1000M-LX 10KM Transceiver |
| ■ 8330-186 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1310) | |
- All part no. with D are with DDM function

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2019 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.