

IPGS-0208C

8 10/100/1000T + 2 10/100/1000T/ Dual speed SFP combo 8 PoE at/af
 Industrial Unmanaged Switch ; Optional 12V input model

- Combo ports for dual behavior of 10/100/1000T or Dual speed SFP (100M/Giga fiber)
- Support IEEE802.3af/at up to 30W per port
- Dual 9.5V~57VDC input(12V model) or Dual 48V DC input (48V model)
- Max PoE budget 240W at 48V, 120W at 24V, 80W at 12V input
- Relay alarm output system events
- EN50155/50121-3-2/50121-4 and EN45545-2 Fire & Smoke verification



OVERVIEW

Lantech IPGS-0208C is a high performance all Gigabit switch with 8 10/100/1000T + 2x 10/100/1000T/Dual speed SFP combo w/8 PoE 802.3af/at Injectors

Dual 48V or 12V input with max PoE budget

Equipped with DC 12~48V redundant input power, the Lantech IPGS-0208C-12V is able to boost input voltage from 12V to 48V then feed each PoE port up to 15.4Watts/30Watts with total PoE power budget 80W at 12V, 120W at 24V input or 240W at 48V input.

High reliability and extended working temperature

Lantech IPGS-0208C provides $\pm 2000V$ EFT and $\pm 6000V$ ESD protection, which can reduce unstable situation caused by

power line and Ethernet. It has high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.


The -E model can be used in extreme environments with an operating temperature range of $-40^{\circ}C$ to $75^{\circ}C$.

It is the most suitable PoE switch for bus, carriage, other vehicles and industrial areas where the power source is limited with 12V or 24V but has demand of IP surveillance or VoIP applications.

FEATURES & BENEFITS

- 8 10/100/1000T + 2 10/100/1000T / Dual speed SFP combo w/8 PoE 802.3af/at Injectors (Total 10 Ports Switch)
- Embedded 8 PoE Injectors IEEE802.3af/at function to feed power up to 30W@54V; 15W @ 48V per port for active operation
- Dual 9.5V~57VDC power input for 12V model with PoE budget 80W at 12V input, 120W at 24V input
- Dual 45V~57VDC power input for 48V model with PoE budget 240W
- Back-plane (Switching Fabric): 20Gbps
- 9KB Jumbo frame supported on all ports
- Provides EFT protection ± 2000 VDC for power line.
- Supports ± 6000 VDC Ethernet ESD protection
- Relay alarm output system events
- IP30 metal housing with DIN rail and Wall-mount** design

DIMENSIONS (unit=mm)

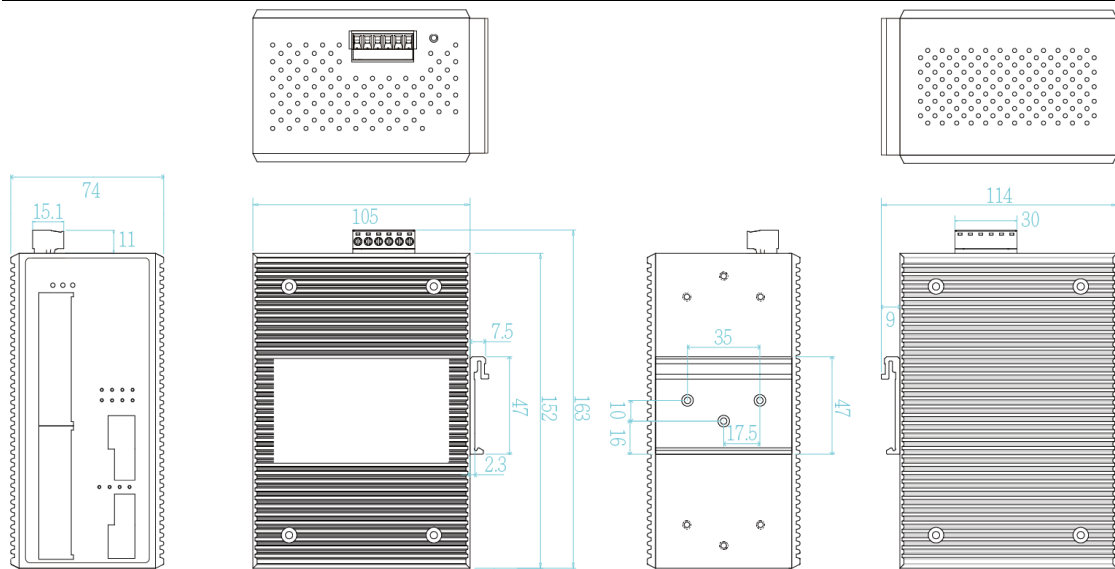

SPECIFICATION

Hardware Specification		
Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T Ethernet IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3at/af Power over Ethernet	Ethernet port: Link/Activity (Green), Speed (Amber); PoE : Link/Act (Green); Mini-GBIC: Link/Activity (Green), Speed (Amber)
Switch Architecture	Back-plane (Switching Fabric): 26Gbps	Operating Humidity 5% – 95% (Non-condensing)
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet / Gigabit Fiber port	Operating Temperature -20°C~60°C / -4°F~140°F (Standard model) -40°C~75°C / -40°F~167°F (E model)
Mac Address	16K MAC address table	Storage Temperature -40°C~85°C / -40°F~185°F
Jumbo frame	9KB on all ports	Power Supply 45~57VDC(48V model); 9.5V~57VDC(12V model)
Connectors	10/100/1000T: 8 x ports RJ-45 with Auto MDI/MDI-X function 10/100/1000T/SFP Combo port: 2 x RJ-45 + 2 x 100/1000 SFP socket Power & P-Fail connector: 1 x 6-pole terminal block	PoE Budget 240W for 45~56V input(48V model) (54V input is recommended for 802.3at 30W applications) 80W at 12V input; 120W at 24V input(12V model)
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)	PoE pin assignment RJ-45 port # 1~#8 support IEEE 802.3at/af End-point, Alternative A mode. Per port provides 30W at 54~57VDC/15W at 48V~57VDC. Positive (VCC+): RJ-45 pin 1,2. Negative (VCC-): RJ-45 pin 3,6.
Optical Cable	1.25Gbps: Multi mode: 0 to 550 m, 850 nm (50/125 μm); 0 to 2 km, 1310 nm (50/125 μm) Single mode: 0 to 10 km/ 30 km/ 40 km, 1310 nm (9/125 μm); 0 to 50 km/ 60 km/ 80km/ 120 km, 1550 nm (9/125 μm) 125Mbps: Multi mode: 0 to 2 km/ 5 km, 1310 nm (62.5/125 μm) Single mode: 0 to 30 km, 1310 nm (62.5/125 μm) WDM 1.25Gbps: Single mode: 0 to 10 km/ 20 km/ 40 km/ 60 km, 1310 nm (9/125 μm); 0 to 80 km, 1490 nm (9/125 μm); 0 to 10 km/ 20 km/ 40 km/ 60 km/ 80 km, 1550 nm (9/125 μm) WDM 125Mbps: Single mode: 0 to 20 km/ 40 km/ 60 km/ 80 km, 1310 nm (9/125 μm); 0 to 20 km/ 40 km/ 60 km/ 80 km, 1550 nm (9/125 μm)	Power Consumption 10W
Protocol	CSMA/CD	Case Dimension Metal case. IP-30, 74 (W) x 114 (D) x 152 (H) mm
LED	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red);	Weight 900 g
		Installation DIN Rail and Wall Mount** Design
		Relay Alarm Provides one relay output for port breakdown, power fail and alarm. Alarm Relay current carry ability: 1A @ DC24V
		EMI & EMS FCC Part 15 Class A IEC/EN61000-6-2 CE EN55032 Class A CE EN55024: CE EN61000-4-2 (ESD) Level 3 CE EN61000-4-3 (RS) Level 3 CE EN61000-4-4 (EFT) Level 3 CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3 CE EN61000-4-8 (Magnetic field) Level 3
		Verifications & Report EN50155/EN50121-3-2/EN50121-4 verification EN45545-2 R13/R22/R23/R24/R25 (EN ISO 4589-2, EN ISO 5659-2, NF X70-100-1 & 2) Fire & Smoke verification; E-mark certificate
		Stability Testing IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
		MTBF NA
		Warranty 5 years

*Future Release

**Optional

ORDERING INFORMATION

- **IPGS-0208C-48V.....P/N: 8350-998**
8 10/100/1000T + 2 10/100/1000T/ Dual speed SFP combo w/8 PoE Mode A 802.3at/af 30W Industrial Switch; dual 45~57VDC input; -20°C to 60°C
- **IPGS-0208C-48V-E.....P/N: 8350-999**
8 10/100/1000T + 2 10/100/1000T/ Dual speed SFP combo w/8 .PoE Mode A 802.3at/af 30W Industrial Switch; dual 45~57VDC input; -40°C to 75°C
- **IPGS-0208C-12V.....P/N: 8351-001**
8 10/100/1000T + 2 10/100/1000T/ Dual speed SFP combo w/8 PoE Mode A 802.3at/af 30W Industrial Switch, dual 9.5V~57VDC input; -20°C to 60°C
- **IPGS-0208C-12V-E.....P/N: 8351-002**
8 10/100/1000T + 2 10/100/1000T/ Dual speed SFP combo w/8 PoE Mode A 802.3at/af 30W Industrial Switch, dual 9.5V~57VDC input, -40°C to 75°C

OPTIONAL ACCESSORIES

DIN Rail Power

- **NDR-480 Series** 480W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-240 Series** 240W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **NDR-120 Series** 120W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)
- **NDR-75 Series** 75W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)

Mini GBIC (SFP)

- | | |
|---|--|
| ■ 8330-162X MINI GBIC 1000SX (LC/MM/0.5KM) Transceiver | ■ 8330-065 MINI GBIC 100Base (LC/MM/5KM) Transceiver |
| ■ 8330-163X MINI GBIC 1000SX2 (LC/MM/2KM) Transceiver | ■ 8330-061 MINI GBIC 100Base (LC/SM/30KM) Transceiver |
| ■ 8330-165X MINI GBIC 1000LX (LC/SM/10KM) Transceiver | ■ 8330-197 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1310) |
| ■ 8340-0591 MINI GBIC 1000LHX (LC/SM/40KM) Transceiver | ■ 8330-198 1.25Gbps BiDi SFP 0.5KM Transceiver (WDM 1550) |
| ■ 8330-166 MINI GBIC 1000XD (LC/SM/50KM) Transceiver | ■ 8330-195 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1310) |
| ■ 8330-169 MINI GBIC 1000XD (LC/SM/60KM) Transceiver | ■ 8330-196 1.25Gbps BiDi SFP 2KM Transceiver (WDM 1550) |
| ■ 8330-167 MINI GBIC 1000ZX (LC/SM/80KM) Transceiver | ■ 8330-188 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1310) |
| ■ 8330-170 MINI GBIC 1000EZ (LC/SM/120KM) Transceiver | ■ 8330-189 1.25Gbps BiDi SFP 10KM Transceiver (WDM 1550) |
| ■ 8330-168 MINI GBIC 10/100/1000T (100m) Transceiver | ■ 8330-186 1.25Gbps BiDi SFP 20KM Transceiver (WDM 1310) |
| ■ 8330-060 MINI GBIC 100Base (LC/MM/2KM) Transceiver | |

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2019 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.