


# 5405

## SCADAPack Digital Input Module

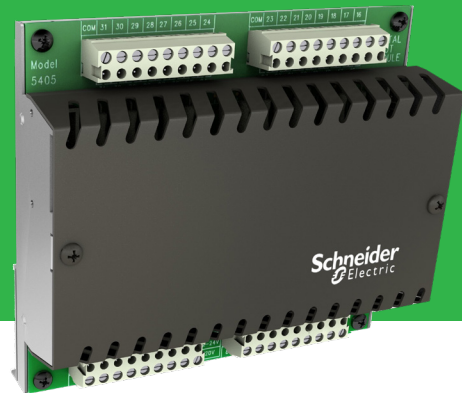

### At a glance


- High density, 32 digital inputs
- Sinking input design
- Low Power
- cCSAus and cULus Class I, Division 2 Hazardous Area Rating
- UL508 listed
- ATEX II 3G and IECEx: Ex nA IIC T4 per EN 60079-15, protection type n (Zone 2)
- 3 year warranty on parts and labor

The SCADAPack™ 5405 Digital input module is part of the SCADAPack family of I/O Expansion and Communication modules, providing flexible I/O and telemetry options.

With the addition of I/O Expansion modules, any<sup>1</sup> SCADAPack Smart RTU is easily expandable from its base I/O configuration to more than 700 process I/O points. Available for a wide range of process I/O requirements, from digital and analog I/O to I/O simulators and a UPS module, a maximum of twenty I/O modules may be connected for an expansion of up to 512 digital outputs, 512 digital inputs, 128 analog inputs, 64 counters and 64 analog outputs, on some models.

# 5405

## SCADAPack Digital Input Module

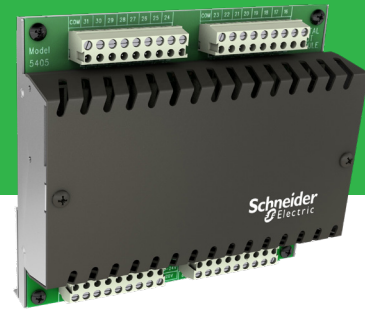


### Specifications – 5405 Digital input module

#### General

Input Points	32
Ranges	12-24 Vdc, 16-24 Vac, 120 Vac/Vdc
Over-Voltage Tolerance	150% sustained over-voltage without damage
Input Current	<ul style="list-style-type: none"> <li>• 6.0 mA typical @ 24 Vdc on the 24 V range</li> <li>• 3.5 mA typical @ 24 Vac on the 24 V range</li> <li>• 2.5 mA typical @ 120 Vdc on the 120 V range</li> <li>• 1.5 mA typical @ 120 Vac on the 120 V range</li> </ul>
DC Input Logic Levels	<ul style="list-style-type: none"> <li>• OFF to ON transition threshold is typically 7.5 Vdc on the 24 Vdc range</li> <li>• OFF to ON transition threshold is typically 55 Vdc on the 120 Vdc range</li> </ul>
AC Input Levels	<ul style="list-style-type: none"> <li>• OFF to ON transition threshold is typically 6 Vac on the 24 Vac range</li> <li>• OFF to ON transition threshold is typically 45 Vac on the 120 Vac range</li> </ul>
Transient Protection	2.5 kV surge withstand capability as per ANSI/IEEE C37.90.1-1989
Isolation	Isolated in 4 groups of 8. Inputs 0-15 are on the bottom edge Inputs 16-31 are on the top edge. Isolation 500 Vac/Vdc from chassis and logic ground
Power Requirements	5 V @ 10 mA with all inputs ON
Terminations	4: 9 pole, removable terminal blocks, 12 to 22 AWG, 15 A contacts
Dimensions	144 mm wide x 127 mm high x 45 mm deep (5.65 inch x 5.00 inch x 1.88 inch)
Packaging	Corrosion resistant zinc plated steel with black enamel paint
Environment	5% RH to 95% RH, non-condensing; -40...60 °C (-40...140 °F)
Addressing	Configurable with 4 DIP switches
AC/DC Operation	2: DIP switches determine AC/DC and 50/60 Hz operation
Visual Indicators	32: Red LED's, field powered. Cannot be disabled to conserve power
Safety	cCSA <sub>US</sub> and cUL <sub>US</sub> Class I, Division 2 Hazardous Area Rating, UL508 listed

# 5405

## SCADAPack Digital Input Module

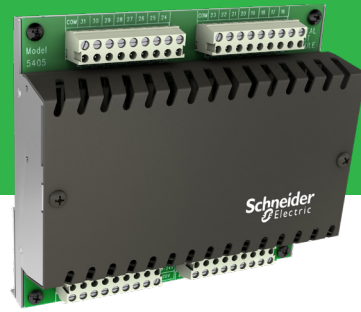

### Model Code – 5405 Digital input module

Part number	Model	Description
TBUX297249	5405-120	32 point, 120 V discrete input module
TBUX297247	5405-24	32 point, 12-24 V discrete input module

**Footnote: 1.** Some I/O Expansion modules are specific to SCADAPack 300 RTUs, others are specific to SCADAPack E RTUs. The SCADAPack 100 does not support any such module. **Note:** Accessories sold separately. **Disclaimer:** Schneider Electric reserves the right to change product specifications. For more information visit [www.schneider-electric.com](http://www.schneider-electric.com).

#### Schneider Electric

Process Automation SCADA & Telemetry  
415 Legget Drive, Suite 101, Kanata, Ontario K2K 3R1 Canada  
Direct Worldwide: +1 (613) 591-1943  
Email: [telemetrysolutions@schneider-electric.com](mailto:telemetrysolutions@schneider-electric.com)  
Toll Free within North America: +1 (888) 267-2232  
[www.schneider-electric.com](http://www.schneider-electric.com)

Life Is On

**Schneider**  
Electric

Part Number TBULM08001-34 v05

© 2017 Schneider Electric. All Rights Reserved. Schneider Electric, Life Is On Schneider Electric, and SCADAPack are trademarks and the property of Schneider Electric SE, its subsidiaries and affiliated companies. All other trademarks are the property of their respective owners. November 2017.