

Product Data Sheet Accutech SL10

Specifications



Accutech SL10

Functional

Sensor Type	Submersible Hydrostatic Level
Location	Field Unit
Frequency Range	900MHz and 2.4GHz band license-free bands
Power	Integrated battery
Network Capacity	Max. 100 field units per base radio Max. 256 base radios per network

Features

Accuracy	$\pm 0.5\%$ of sensor URL over temperature range -20 to +60°C (-4 to +140°F)
Stability	Combined zero and span stability: less than $\pm 0.5\%$ of sensor URL per year at 21°C (70°F)
Sampling and Transmission Characteristic	The level field unit samples pressure at regular intervals. The data may then be transmitted to the base radio for centralised monitoring and data acquisition. The user specifies how frequently the process is monitored and how often data is transmitted. <ul style="list-style-type: none"> Level – user designates low rate and high rate conditions Sampling rate – user selectable from 1 to 60 seconds (low rate) and from 1 to 30 seconds (high rate) Transmission rate – user selectable from 1 second to 60 seconds (low and high rate) Accutech Manager can be used for Real-time monitoring of the process information. The user can set thresholds to represent out of spec conditions.
Remote Configuration Interface	Accutech Manager, Windows™-based GUI software, providing network-wide monitoring and performance-management features and field unit configuration capabilities.
Local Configuration Interface	<ul style="list-style-type: none"> Integrated LCD with membrane-switch buttons Display provides pressure reading and error messages, if applicable Configure sampling and RF parameters locally using membrane-switch buttons
RF Characteristics	900MHz: <ul style="list-style-type: none"> 902 to 928MHz Frequency Hopping Spread Spectrum (FHSS), FCC certified ISM license-free band 915 to 928MHz (Australia) 921 to 928MHz (New Zealand) Data Rates: 4,800, 19,200 or 76,800bps 0.4W maximum 2.4GHz: <ul style="list-style-type: none"> 2400 to 2483.5MHz ISM license-free band Frequency Hopping Spread Spectrum (FHSS) Radio Data Rates: 50/100kbps (FSK Modulation), 200kbps (GFSK Modulation) Typical Electrical Transmit Power: +10.6dBm Typical Receive Sensitivity (0.1% BER): - 102dBm @ 50kbps, - 99dBm @ 100kbps, - 99dBm @ 200kbps Typical CW Receiver Blocking Rejection: 64dB for CW @ +/- 5MHz, 74dB for CW @ +/- 30MHz
Self-Diagnostics	<ul style="list-style-type: none"> Low battery notification – indicates the need to replace the battery (approximately one month advance notification). Contains extensive self-checking software and hardware that continuously monitors operation. Any sensor or device parameter that is out of spec is identified and reported.

General

Operating Ambient Environment	<ul style="list-style-type: none"> -20 to +60°C (-4 to +140°F) steady-state Process temperature -20 to +60°C (-4 to +140°F) steady-state Ambient temperature -20 to +60°C (-4 to +140°F) electronics Humidity: 0 to 95%, non-condensing
Power	<ul style="list-style-type: none"> Self-contained power Standard Accutech field units include a single C-Cell (900MHz) or D-Cell (2.4GHz) lithium battery that offers battery life up to ten years of service, depending on data rates and battery options.
Physical Characteristics	<ul style="list-style-type: none"> Base Plate: 304 Stainless Steel Cover: GE Lexan®, V-0 rating and UV resistant Sensor Body: 316L Stainless Steel with Buna-N seal Submersible Sensor Cable: Sensor cable and vent tube is encased in polyurethane jacket, rated for use in many harsh environments. Vent tube protected with a hydrophobic filter.
Operating Shock and Vibration	Tested per IEC 60068-2-6 (vibration) and 2-27 (shock)
Random Vibration Characteristics	Tested to withstand 6 g's, 15 minutes per axis from 9 – 500Hz
Electromagnetic Compatibility	Operates within specification in fields from 80 to 1,000MHz with field strengths to 30V/m. Meets EN 50082-1 General Immunity Standard and EN 55011 compatibility emissions standard.
Certifications	North America HAZLOC: <ul style="list-style-type: none"> cCSA_{us} Intrinsically Safe: Exia IIC; AEx ia IIC Class I, Div. 1, Groups A, B, C & D, T3 Class II, Div. 1, Groups E, F and G, T3 Class III, T3 Class 1, Zone 0, AEx ia IIC, T3 Class I, Div. 2, Groups A, B, C & D, T4 Class II, Div. 2, Groups F and G, T4 Class III, T4 ATEX/IECEX HAZLOC: <ul style="list-style-type: none"> LCIE Intrinsically Safe: Ex ia IIC T3 EMC & Radio: <ul style="list-style-type: none"> North America : FCC , IC Europe: CE Mark (R&TTE) Australia/New Zealand: C-Tick

Disclaimer: Schneider Electric reserves the right to change product specifications. For more information visit www.schneider-electric.com.

Product Data Sheet Accutech SL10 Model Code


	TBUASLTJPN00RA15A represents a typical part number.					
Model	Type					
TBUASL	Wireless Submersible Level Field Unit					
Code	Select: RF Module Type					
T	902MHz - 928MHz band (FCC / IC)					
D	915MHz - 928MHz band (Australia)					
N	915MHz - 921MHz band (New Zealand)					
F	2.4GHz band					
Code	Select: Certifications					
J	Intrinsically Safe Protection CSA – see product data sheet for certification details					
Q	ATEX & IECEx – see product data sheet for certification details					
Code	Select: Housing & Battery Pack					
P	NEMA4 Polycarbonate Housing with 1 Cell (Available with Intrinsically Safe Rating)					
Code	Select: Future Option					
N	None					
Code	Select: Integral Antenna or Cable & Connector Interface					
00	Integral Antenna with Antenna Cover. The 2.4GHz NEMA4 unit also comes with an external antenna connector					
01	For 900MHz RF Module Systems – or – the 2.4GHz in a NEMA4X Aluminum Housing External YAGI Antenna, 6db, attached to base of unit (not available with 2.4GHz RF NEMA4 unit)					
10	10ft. (3.05m) cable with N-Male connector for remote antenna configurations (not available with 2.4GHz RF NEMA4 unit)					
25	25ft. (7.62m) cable with N-Male connector for remote antenna configurations (not available with 2.4GHz RF NEMA4 unit)					
Code	Select: Sensor Mounting					
	Standard Field Unit					
N	Remote Sensor with no intermediate cable gland					
R	Remote Sensor with SS & Brass intermediate cable gland					
T	Remote Sensor with Nylon intermediate cable gland					
	Direct Tank Port Connect Field Unit (1" NPT Male) – For Integral Antenna units only					
D	Remote Sensor with no intermediate cable gland					
Code	Select: Sensor Range & Cable Length					
	First letter in Code designates the Sensor Range; following two-digit number specifies sensor cable length					
	Upper Range Limit		(URL) Proof Pressure		Standard Cable Length	
	PSIG	(BAR)	PSI	(BAR)	Feet	(Meters)
A15	5*	(0.345)	10	(0.689)	15	(4.6)
B30	10*	(0.689)	20	(1.379)	30	(9.1)
C40	15	(1.034)	30	(2.068)	40	(12.2)
F75	30*	(2.068)	60	(4.137)	75	(22.9)
Code	Future Option					
A	None					

* Consult factory for lead times on units with custom cable lengths longer than the Standard Cable Length

Sensor Element Size: Length = 5.0" (12.7cm) , Outer Diameter = 1.063" (2.7cm)

Product Data Sheet Accutech SL10
Dimensions

900MHz RF and Battery Unit
(Sensor and external antenna option shown)

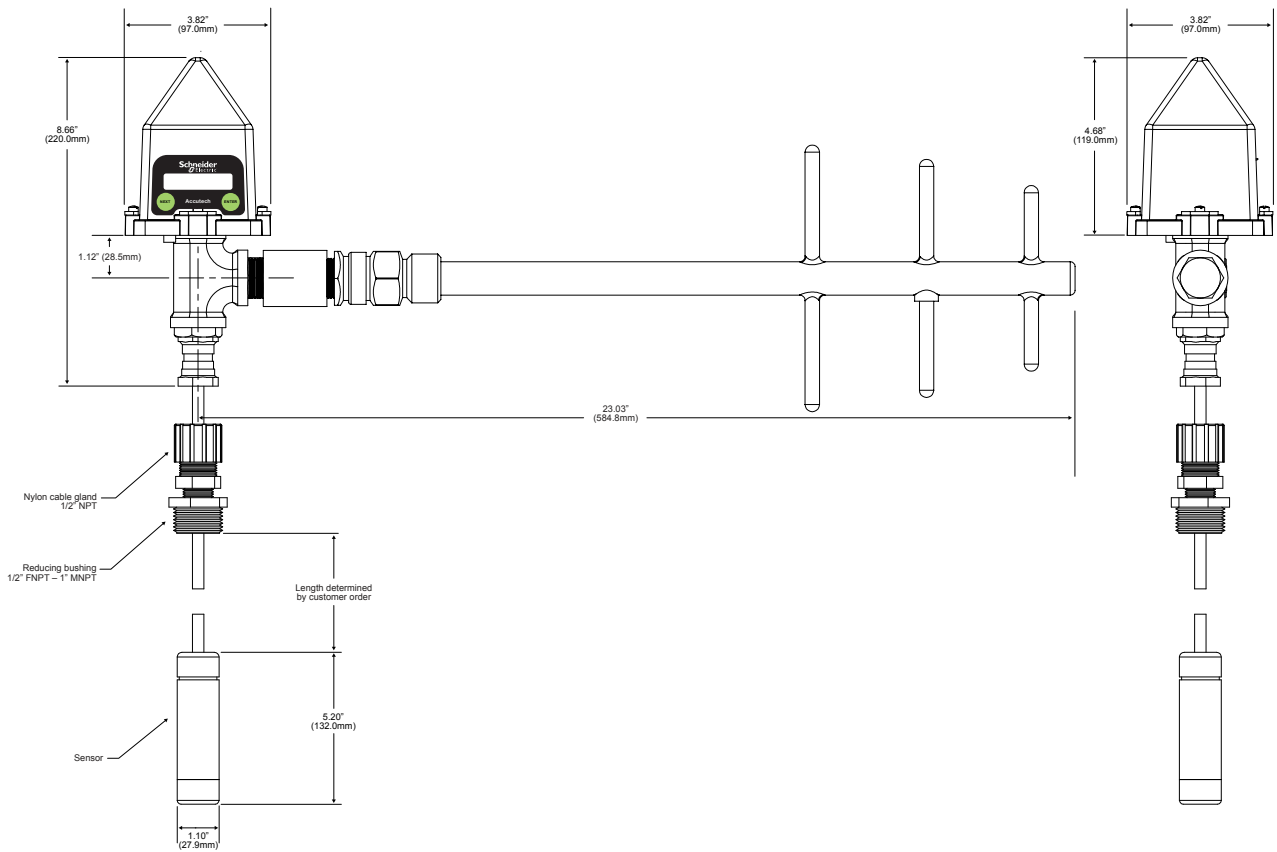

2.4GHz RF and Battery Unit
(Sensor and external antenna not shown for clarity)

